



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 13 JAN 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03253600.5 ✓

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr.:

Application no.: 03253600.5

Demande no:

Anmeldetag:

Date of filing: 06.06.03

Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Rockwool International A/S
Hovedgaden 584
2640 Hedehusene
DANEMARK

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:

(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.

If no title is shown please refer to the description.

Si aucun titre n'est indiqué se référer à la description.)

Processes of forming mineral fibres

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)


Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

C03B/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

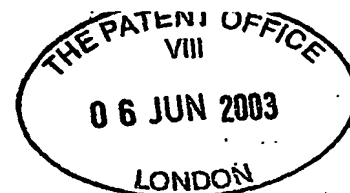

ROCKWOOL INTERNATIONAL A/S

LAS01460EP

PROCESSES OF FORMING MINERAL FIBRES

This invention relates to processes for production of
5 man-made vitreous fibres (MMVF) which contain phosphorus.

It is well known to produce man-made vitreous fibres,
often described as mineral fibres, by providing a charge of
mineral material, melting the charge in a furnace and
fiberising the resulting melt to form fibres. The fibres
10 can be used for a variety of purposes, including heat and
sound insulation, fire protection, as growth substrates,
etc.

The final composition of the fibres is generally
expressed in terms of oxides of elements contained in the
15 fibres and it is well established that the composition of
the charge of mineral materials, and hence the composition
of the melt and the final fibres, can influence the
properties of the final fibres.

In particular, it has been well established for some
20 years that a content of phosphorus P_2O_5 in the fibres can
have a positive influence on the properties of the melt and
the fibres under certain circumstances. For instance, a
number of patent publications have focused on the fact that
content of P_2O_5 in the fibres can improve the biosolubility
25 of the fibres and hence the level of biological safety
which can be attributed to such fibres.

However, only a relatively narrow range of materials
has been suggested as suitable raw materials for inclusion
in a charge which can contribute P_2O_5 to the final fibres.
30 For instance, WO 99/08970 suggests apatite.

WO 95/29135 discloses that the inclusion of P_2O_5 and
 B_2O_3 in a composition improves the production
characteristics and physiological dissolution rates of
mineral wool fibres. Calcium phosphate is disclosed as a
35 phosphorus-containing raw material.

WO 98/40321 discloses mineral fibres having a
composition which comprises from 1 to 6% P_2O_5 . Apatite and

synthetic phosphate are suggested as phosphorus-containing raw materials.

EP-A-459897 discloses fibres having 1 to 10% P_2O_5 content, and phosphorus pentoxide is disclosed as a
5 suitable phosphorus source.

US 5198190 generally suggests use of industrial wastes to produce mineral wool. However, it is specifically stated that phosphorus is removed from the waste prior to formation into mineral wool. Indeed, none of the wastes
10 used appears to contain phosphorus.

US 5496392 is similar in that it concerns production of products such as mineral wool from industrial waste materials after removal of valuable metals, metal alloys and metal oxides. However, again no wastes are discussed
15 which contain significant levels of phosphorus. Use of second cut spent pot liner (SPL) is mentioned but the maximum content of phosphorus in this waste is 0.20%.

EP-A-009418 generally discloses a glass wool composition which can contain up to 4% P_2O_5 and suggests
20 industrial wastes in general but does not specifically mention phosphorus-containing waste materials and indeed no specific examples are given of fibres containing P_2O_5 .

SU 1785520 describes treatment of blast furnace slag to form an alloy and a secondary slag, which is said to
25 have a P_2O_5 content of up to 27%, and which can be used for the production of mineral wool.

EP-A-468,414 describes production of paper made from slag wool. Thus it is not concerned with producing mineral wool for subsequent use in the applications generally known
30 for mineral wool. The method involves taking dewatered sludge and, generally, adding the sludge to a cyclone furnace in which the sludge is combusted to sludge ash. The sludge ash is then melted to form a liquid sludge slag which is formed into mineral wool. Although this is the
35 usual method described, it is also suggested that sludge ash can be preformed by burning dried ash in an incinerator

and then adding the resulting product, together with a calcium content adjusting agent, to the melting furnace.

In practice the preferred material for inclusion of phosphorus is the virgin rock apatite. The most commonly
5 used form of apatite is fluoro apatite, which consequently brings halogens into the process, which must often be dealt with to avoid release of undesirable waste materials during production. Chloro apatite is also used and leads to similar problems, as well as the potential for corrosion of
10 the apparatus.

Thus it can be seen that although there have for some years been suggestions that phosphorus should be included as a component of mineral fibres, there remains a need for provision of raw materials which can bring suitable P_2O_5
15 content into the fibres, without the need for potentially expensive raw materials and without the need for materials which inevitably bring with them components such as halogens, which can be undesirable in some applications.

Thus according to a invention we provide a process of
20 producing man-made vitreous fibres having a phosphorus content of at least 0.5%, measured as weight % P_2O_5 , comprising providing a charge of mineral material which includes briquettes, melting the charge in a furnace to provide a melt and fiberising the melt to form fibres,
25 wherein the briquettes comprise a non-virgin rock material comprising at least 2% phosphorus. The non-virgin rock material is an ash material selected from sewage sludge ash, bone meal ash, granulated sewage sludge slag and mixtures thereof.

30 We have found that these materials are suitable for inclusion in briquettes for the production of mineral fibres and provide an appropriate level of phosphorus, at levels of ash which can conveniently be incorporated. An advantage of use of these ash raw materials is the
35 possibility of avoidance of introduction of halogens into the process.

Furthermore, use of these materials solves a further problem concerning their disposal. This is applicable to sewage sludge in particular. Generation of sewage sludge is a global environmental problem. At present there are few solutions for disposal of sewage sludge, but combustion to sewage sludge ash is one of the primary methods. However, the remaining ash has heavy metal content and is therefore not easily disposed of as, for instance, fertiliser, since the heavy metal content deters use by farmers. Therefore the most common solution for disposal of sewage sludge ash in many countries is landfilling, which is often a costly solution.

Consequently, the present invention finds, as well as a novel, beneficial and economical material for the provision of phosphorus-containing MMVF, a solution to the problem of disposal of sewage sludge ash, as well as other waste materials such as bone meal ash.

The uses for sewage sludge ash which have been disclosed previously are relatively limited and include use as a component of bricks and inclusion in cement mortar, as well as use in production of paper.

It is particularly surprising that it is possible to use sewage sludge ash, bone meal ash and certain other phosphorus-containing materials in certain classes of fibre production processes. These materials are usually available in small particle size form and consequently in processes in which the furnace is a shaft furnace it is not possible to include such ash materials in the charge in significant amounts in the form as received. Instead, it is generally accepted as necessary to include them as a component of a briquette. However, it has also generally been accepted that inclusion of significant levels of phosphorus-containing materials in briquettes would be expected to have detrimental effects on the strength of the briquettes. It is important for processing reasons that briquettes should have adequate strength but this is

particularly important in a shaft furnace where the briquettes form part of a stack of mineral materials.

However, surprisingly it has now been found that it is possible to include the phosphorus-containing waste ash materials described above, in briquettes whilst maintaining adequate briquette strength.

In this specification, all amounts of fibre components are expressed as weight %, measured as the relevant oxide, unless otherwise stated.

10 The invention can be used to produce a variety of types of man-made vitreous fibre, including rock fibres and glass fibres.

Glass fibres traditionally contain relatively low total amounts of alkaline earth metal and iron (calcium, magnesium and iron), generally below 12% measured as total oxides (iron being measured as FeO).

Rock fibres generally contain at least 15%, usually more than 20%, total calcium, magnesium and iron oxides. Rock fibres preferably contain at least 1%, often at least 3% and frequently 5 to 12% iron measured as FeO.

The fibres generally contain SiO₂ in an amount of from 30 to 70%.

The invention is particularly useful in the production of fibres which can be shown to be soluble in physiological saline. Some such fibres contain a relatively low amount of aluminium, for instance not more than 4%, optionally together with 1 to 5% boron. Typical of these low aluminium fibres are the disclosures in, for instance, EP-A-459897 and in WO 92/09536, WO 93/22251 and WO 96/00196.

30 The invention can also be applied to the production of fibres which have higher aluminium content, for instance at least 15% and even at least 17% and in certain cases at least 18% Al₂O₃, eg. up to 30, 35 or 40% Al₂O₃. Suitable high aluminium, biologically soluble fibres which can be advantageously made in the present invention are described in WO 96/14454 and WO 96/14274. Others are described in WO 35 97/29057, DE-U-2970027 and WO 97/30002. Of course, in the

invention it is essential that the fibres contain at least 0.5% phosphorus in addition to the components discussed in these compositions.

- In general the fibres and the melt from which they are formed have an analysis within the various ranges defined by the following preferred lower and upper limits:
- SiO₂ at least 30, 32, 35 or 37; not more than 51, 48, 45 or 43
 - Al₂O₃ at least 12, 14, 15, 16 or 18; not more than 35, 30, 26 or 23
 - CaO at least 8 or 10; not more than 30, 25 or 20
 - MgO at least 2 or 5; not more than 25, 20, 15, or 12
 - FeO (including Fe₂O₃) at least 2, 3 or 5; not more than 15, 12, 10 or 8
 - FeO + MgO at least 8, 10, 12; not more than 25, 20, 15
 - Na₂O + K₂O zero or at least 1 or 2; not more than 10 or 8
 - CaO + MgO at least 20, 25, 30; not more than 45, 40
 - TiO₂ zero or at least 1; not more than 4, 2
 - TiO₂ + FeO at least 4, 6; not more than 12, 10
 - B₂O₃ zero or at least 1; not more than 5, 3
 - Others zero or at least 1; not more than 8, 5

The MMV fibres have a phosphorus content, measured by weight as P₂O₅, of at least 0.5%. P₂O₅ content can be up to 10% but is often not more than 5 or 6% and can preferably be in the range 0.5 to 4%.

One preferred class of fibre for production in the invention comprises from 16 to 18 wt.% Al₂O₃. Preferably such fibres are formed from a melt which has viscosity at 1400°C from 15 to 17 poise. A second class of preferred fibres has content of Al₂O₃ from 12 to 15% and are formed from a melt which has viscosity at 1400°C of from 10 to 14 poise. These classes of fibre preferably contain at least 4 wt.% P₂O₅.

Examples of preferred composition ranges include 35 to 45% SiO₂, 12 to 17.5% Al₂O₃, 15 or 18 to 28% CaO, 5 to 15% MgO, 3 to 8% FeO, 0 to 5% Na₂O plus K₂O, 0 to 3% TiO₂, 0.5 to 5% P₂O₅ and 0 to 1% MnO.

Other preferred fibres have compositions 35 to 42% SiO_2 , 12 to 16.5% Al_2O_3 , 20 to 24% CaO , 9 to 15% MgO , 3 to 8% FeO , 0 to 5% Na_2O plus K_2O , 0 to 3% TiO_2 , 0.5 to 5% P_2O_5 , 0 to 1% MnO .

5 In both of these preferred compositions the melt has a viscosity at $1,400^\circ\text{C}$ not more than 20 poise.

The fibres preferably have a sintering temperature above 800°C , more preferably above 1000°C .

10 The melt preferably has a viscosity at fibre forming temperature of 2 to 100 poise, preferably 3 to 70 poise, more preferably 10 to 30 poise at 1400°C .

15 The fibres preferably have an adequate solubility in lung fluids as shown by *in vivo* tests or *in vitro* tests, typically conducted in physiological saline buffered to about pH 4.5. Suitable solubilities are described in WO 96/14454. Usually the rate of dissolution is at least 10 or 20nm per day in that saline.

20 In some compositions it is particularly desirable that the level of aluminium is below 14% and the content of phosphorus is at least 1%. High alumina levels lead to high melt viscosity, which is beneficial for processing purposes - melt viscosity which is too low can lead to processing problems. Thus fibres having relatively low aluminium levels can tend to result in a melt which has a
25 rather low viscosity. Inclusion of phosphorus allows viscosity to be increased, without at the same time compromising biosolubility.

30 In the process the mineral materials are charged to a furnace. Any of the typical furnaces used for forming MMVF melts can be used. The furnace can be a tank furnace, which includes gas or oil fired tank furnaces, molybdenum and graphite electrode tank furnaces and electric arc furnaces. Preferably, however, the furnace is a shaft
35 furnace in which a stack of granular mineral material is heated and melt drains to the base of the stack as a pool from which it is run off to the fibre forming process. In some instances the melt is run from the base of the stack

into another chamber where it collects as a pool and from which it is run off to the fibre forming process. The preferred type of shaft furnace is a cupola.

The MMV fibres may be made from the mineral melt in conventional manner. They are generally made by a centrifugal fibre forming process. For instance the fibres may be formed by a spinning cup process in which they are thrown outwardly through perforations in a spinning cup, or melt may be thrown off a rotating disc and fibre formation may be promoted by blasting jets of gas through the melt. Alternatively fibre formation may be conducted by pouring the melt onto the first rotor in a cascade spinner. Preferably the melt is poured onto the first of a set of two, three or four rotors each of which rotates about a substantially horizontal axis whereby melt on the first rotor is primarily thrown onto the second (lower) rotor although some may be thrown off the first rotor as fibres, and melt on the second rotor is thrown off as fibres although some may be thrown towards the third (lower) rotor, and so forth.

In the invention it is essential that the charge of mineral material comprises a non-virgin rock material as defined above. Preferably it is an ash, selected from sewage sludge ash and bone meal ash.

Any sewage sludge ash may be used in the invention. Preferred sewage sludge ash materials have the following ranges of components, measured as oxides except in the case of chlorine.

SiO₂ 25 to 35%
 Al₂O₃ 5 to 15%
 TiO₂ 0.5 to 3%
 Fe₂O₃ 8 to 20%
 CaO 15 to 25%
 MgO 0 to 5%, preferably 0.5 to 4%
 Na₂O 0 to 3%; preferably 0.1 to 2%
 K₂O 0 to 3%, preferably 0.5 to 2%

P_2O_5 10 to 35%, preferably 14 to 30%, more preferably up to 25%,

MnO_2 0 to 2%, preferably 0.1 to 1%

ZnO 0 to 2%, preferably 0.1 to 1%

5 SO_3 0 to 7%, preferably 2 to 6%

Cl 0 to 2%, preferably 0.1 to 1%.

Generally the sewage sludge ash contains at least SiO_2 , Al_2O_3 , TiO_2 , Fe_2O_3 , CaO and P_2O_5 , with the remaining components being optional.

10 Bone meal ash (which can be described alternatively as "meat and bone meal ash") generally has content of oxides as follows:

SiO_2 5 to 15%

Al_2O_3 0 to 5%, preferably 0.5 to 4%

15 FeO 0 to 2%, preferably 0.1 to 1%

CaO 25 to 55%

MgO 0 to 5%, preferably 0.5 to 3%

Na_2O 0 to 4%, preferably 0.5 to 3%

K_2O 0.5 to 6%, preferably 2 to 5%

20 P_2O_5 20 to 50%, preferably 30 to 40%

SO_3 1 to 10%, preferably 2 to 6%.

The charge preferably comprises at least 3 weight %, more preferably at least 4 weight %, most preferably at least 5 weight % of the defined non-virgin rock material.

25 The level of defined non-virgin rock material included in the charge can be up to 25%, but preferably is not more than 20% and can be up to 15%.

Sewage sludge ash is the most preferred ash material for use in the invention.

30 In the invention a non-virgin rock material comprising at least 2% phosphorus is included in the briquettes. By non-virgin rock material we mean materials which are the waste products of an earlier used process, ie. industrial waste (which would often be sent for disposal), and we
35 exclude standard virgin rock materials such as apatite which have not previously passed through any industrial process.

In the invention the non-virgin rock material is provided in particulate form before incorporation into the briquettes.

When the non-virgin rock material is an ash, particle size is generally at least 90 weight % below 300 microns, preferably at least 75 weight % below 200 microns. Often at least 30%, preferably at least 50%, of the particles have size below 120 microns. Preferably at least 40% of the particles have size below 90 microns. Preferably at least 45% of the particles have size below 75 microns. Preferably at least 60% of the particles have size below 45 microns. However, at least 70% of the particles generally have size above 25 microns.

In some cases, especially when the non-virgin rock material is sewage sludge ash, it is preferred that not more than 40 wt.% of the particles have diameter below 100 μm . Preferably not more than 60% have diameter below 200 μm . More preferably not more than 70% have diameter below 500 μm . Preferably not more than 80% have diameter below 1000 μm .

A further material suitable for use as the non-virgin rock material in the invention is granulated sewage sludge slag. This product is made by heating sewage sludge in a furnace to form a molten slag and granulating the resulting solidified slag. Generally the sewage sludge is degassed and formed into briquettes before introduction into the furnace. The furnace is generally a shaft furnace such as a cupola furnace. An example of such a product is commercially available from the company RGS90 Industri under the name Carbogrit.

Granulated sewage sludge slag generally contains the following components:

Mineral	Generally	Example
SiO_2	40-45 wt. %	43.4 wt. %
Al_2O_3	10-18 wt. %	14.5 wt. %
Fe_2O_3	5-12 wt. %	9.2 wt. %

	CaO	15-20 wt. %	18.1 wt. %
	MgO	2-8 wt. %	5.4 wt. %
	MnO ₂	0-3 wt. %	0.1 wt. %
	TiO ₂	0-3 wt. %	0.6 wt. %
5	P ₂ O ₅	5-10 wt. %	7.3 wt. %
	K ₂ O	0-3 wt. %	0.9 wt. %
	Na ₂ O	0-3 wt. %	1.0 wt. %
	SrO	0-2 wt. %	0.3 wt. %
	SO ₃	0-1 wt. %	0.03 wt. %
10	Others	0-2 wt. %	-

In the invention the briquettes preferably comprise at least 3 weight %, more preferably at least 4 weight % non-virgin rock material. The level can be up to 50% but preferably is not more than 35%, more preferably not more than 25%.

Levels of sewage sludge ash not more than 25%, preferably not more than 20%, can be advantageous. When the non-virgin rock material is granulated sewage sludge slag, the briquettes generally comprise not more than 50%, preferably not more than 35%, more preferably not more than 25% granulated sewage sludge slag.

In the invention the briquettes can be made in standard manner by providing a mixture of granular materials comprising the non-virgin rock material and moulding and compacting these materials, generally in the presence of moisture and a binder. The briquettes are then allowed to cure and harden.

The binder may be any of the known binders for briquettes for use in mineral wool production. Thus the binder may be inorganic, such as cement, in particular Portland cement. Alternatively it may be organic, such as molasses.

The briquettes are usually of standard size, namely having smallest dimension at least 50 mm and largest dimension at least 100 mm.

It is preferred that the moisture content of the briquette composition which is moulded is at least 10%, preferably at least 12%, more preferably at least 15%. Generally it is not more than 25%, preferably not more than 20%. We find that these levels of moisture content assist in obtaining adequate strength values.

It is preferred that the briquette composition comprises waste mineral wool, generally of the same type as that being produced in the process, also in order to improve briquette strength. Preferred amounts are at least 1%, preferably at least 5%, but generally not more than 15%, preferably not more than 10%.

After moulding, the briquettes are allowed to cure before use. Preferably curing is allowed to occur for at least 24 hours, preferably at least 48 hours and more preferably at least 36 hours. In some cases it is preferred that curing lasts at least 72 hours. After curing, the briquettes are then used by inclusion in the charge in the process.

Preferably the briquettes have density at least 1.8 kg/dm³ immediately after production.

In the invention fibres are formed from a melt. This is provided by means of a charge of mineral material including the briquettes. When the furnace is a shaft furnace such as a cupola furnace, fuel is normally also added to the furnace together with the charge of mineral material. This is often in the form of coke, which does not form part of the melt.

The fibres produced according to the processes of the invention can be used for any of the known applications for MMV fibres. For instance they can be used for fire insulation and protection, sound insulation, as growth substrate and in granulated form as a filler.

CLAIMS

1. A process of producing man-made vitreous fibres having a phosphorus content of at least 0.5%, measured as weight
5 % P_2O_5 , comprising
 providing a charge of mineral material which includes briquettes,
 melting the charge in a furnace to provide a melt and
 fiberising the melt to form fibres,
10 wherein the briquettes comprise a non-virgin rock material comprising at least 2% phosphorus, the non-virgin rock material being selected from the group consisting of sewage sludge ash, bone meal ash, granulated sewage sludge slag and mixtures thereof.
- 15 2. A process according to claim 1 in which the non-virgin rock material comprises at least 3% phosphorus.
3. A process according to claim 2 in which the non-virgin rock material comprises at least 5% phosphorus.
4. A process according to any preceding claim in which
20 the non-virgin rock material comprises sewage sludge ash.
5. A process according to any preceding claim in which the non-virgin rock material comprises granulated sewage sludge slag.
6. A process according to any preceding claim in which
25 the briquettes comprise at least 3% by weight, preferably at least 4% by weight, more preferably at least 5% by weight non-virgin rock material.
7. A process according to any preceding claim in which
30 the briquettes comprise not more than 15%, preferably not more than 15%, more preferably not more than 10%, by weight non-virgin rock material.
8. A process according to claim 1 in which the non-virgin rock material is granulated sewage sludge slag and the briquettes comprise not more than 50 wt.% granulated sewage
35 sludge slag.
9. A process according to claim 1 in which the non-virgin rock material is sewage sludge ash and the charge of mineral material contains from 3 to 25%, preferably from 4 to 15% sewage sludge ash, by weight of charge.

10. A process according to any preceding claim in which the briquettes have moisture content of at least 12%, preferably at least 15%.
- 5 11. A process according to any preceding claim in which the briquettes additionally comprise waste mineral wool.
12. A process according to any preceding claim in which the briquettes are produced at least two days prior to their inclusion in the charge.
- 10 13. A process according to any preceding claim in which the fibres comprise less than 17% aluminium, preferably less than 15%, most preferably between 10 and 15% aluminium, measured as weight % Al_2O_3 .
- 15 14. A process according to any preceding claim in which the fibres comprise from 0.5 to 10% phosphorus, preferably less than 5% phosphorus, measured as weight % P_2O_5 .
- 15 15. A process according to any preceding claim in which the furnace is a shaft furnace, preferably a cupola furnace.
- 20 16. A process of producing man-made vitreous fibres comprising providing a charge of mineral material which includes briquettes, melting the charge in a furnace to provide a melt and fiberising the melt to form fibres, wherein the briquettes comprise sewage sludge ash.

ABSTRACT

PROCESSES OF FORMING MINERAL FIBRES

- 5 The invention provides a process of producing man-made vitreous fibres having a phosphorus content of at least 0.5%, measured as weight % P_2O_5 , comprising
- providing a charge of mineral material which includes briquettes,
- 10 melting the charge in a furnace to provide a melt and fiberising the melt to form fibres,
- wherein the briquettes comprise a non-virgin rock material comprising at least 2% phosphorus, the non-virgin rock material being selected from the group consisting of sewage
- 15 sludge ash, bone meal ash, granulated sewage sludge, slag and mixtures thereof.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☒ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.